

**DATA SHEET FOR FLP STOPPING PLUG****TECHNICAL DATA:**

PRODUCT	:	CAT NO.-SP/2019
ENCLOSURE	:	FLAME PROOF (Ex -d ), Gas Group IIA , IIB , IIC As per IS/IEC 60079-1 : 2014
PROTECTION	:	WEATHER PROOF IP – 66 AS PER IS/IEC 60529:2001 (Reaffirmed 2014)
AREA CLASSIFICATION	:	Ex db IIC T6 Gb ( EX tb / tc IIIC T85 C Db/Dc (ZONE 1 & 2 & Zone 21 & 22 )
CERTIFICATION	:	CIMFR, BIS, PESO
MATERIAL	:	BRASS
GASKET	:	RUBBER "O" RING


**SELECTION CHART**

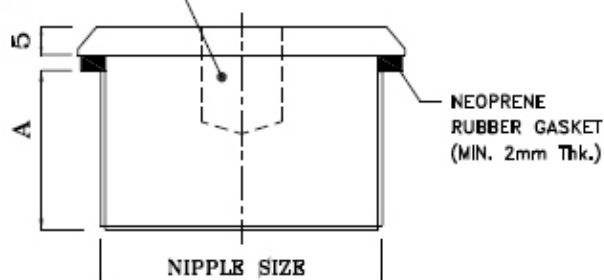

SR. NO	NIPPLE/THREAD SIZE
1.	M12 OR ½" ET
2.	M19/M20 OR ½" NPT OR ¾" ET
3.	M25 OR ¾" NPT OR 1" ET
4.	M32 OR 1" NPT OR 1 ¼" ET
5.	M38/M40 OR 1 ½" NPT OR 1 ½" ET
6.	M50 OR 1 ½" NPT OR 2" ET
7.	M62 OR 2" NPT OR 2 ½" ET
8.	M75 OR 2 ½" NPT OR 3" ET

**OPTIONS**

SR.NO	PARTICULAR	OPTIONS
1.	MATERIAL OF CONSTRUCTION	STAINLESS STEEL/M.S./ALUMINIUM



 HEX. SLOT FOR ALLEN/  
HEX. KEY TO FIX OR  
REMOVE PLUG

**STOP PLUG****PLAN**