




DATA SHEET FOR FLP SWITCH FUSE UNIT

TECHNICAL DATA:

- PRODUCT : CAT NO.: RCP /221.
- ENCLOSURE : FLAME PROOF (Ex -d), Gas Group IIA , IIB
As per IS/IEC 60079-1 : 2014
- PROTECTION : WEATHER PROOF IP – 66 AS PER IS/IEC 60529:2001
(Reaffirmed 2014)
- AREA & TEMP. CLASS : Ex db IIA IIB T6 Gb (EX tb/tc IIIC T85 C Db/Dc
(ZONE 1 & 2 & Zone 21 & 22)
- CERTIFICATION : CIMFR, BIS, PESO
- TEMP CLASS : T6
- MATERIAL : DIE CAST ALUMINIUM ALLOY
- FINISH : EPOXY POWDER COATED SHADE AS PER IS : 5
- EARTHING : 1 No INTERNAL & 2 No's EXTERNAL
- HARDWARE : STAINLESS STEEL
- GASKET : 'O' RING ENDLESS GASKET NEOPRENE / SILICON
- NAME PLATE : SS NAME PLATE CUM WARNING PLATE
- FUSE : HRC FUSE LINK.

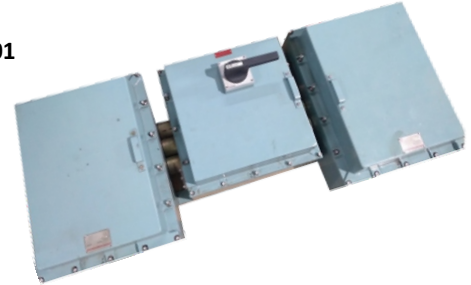

OPTIONS

| SR. NO | PARTICULAR | OPTIONS |
|--------|--------------------------|--------------------------------|
| 1. | MATERIAL OF CONSTRUCTION | STAINLESS STEEL |
| 2. | GLAND & PLUG | BRASS / SS / ALUMINIUM |
| 3. | COLOUR SHADE | 631, 632, 355, 7031, 7032 etc. |
| 4. | CANOPY | M.S POWDER COATED/ FRP / GI |

SELECTION CHART

| SR.NO | RATING | VOLTAGE | ENTRIES |
|-------|----------|---------|----------------------------|
| 1 | 400 A TP | 415 V | AS PER CUSTOMER REQUIRMENT |
| 2 | 630 A TP | 415 V | AS PER CUSTOMER REQUIRMENT |

