DATA SHEET FLP FOR FLP SOOT BLOWER PANEL

TECHNICAL DATA:

PRODUCT	:	CAT NO : MCDB / 186 / RCP/ 215 / RCP/221
ENCLOSURE	:	FLAME PROOF (Ex –d), Gas Group IIA, IIB As per IS/IEC 60079-1 : 2014
PROTECTION	:	WEATHER PROOF IP – 66 AS PER IS/IEC 60529:2001 (Reaffirmed 2014)
AREA & TEMP. CLASS	:	Ex db IIA IIB T6 Gb EX tb/tc IIIC T85 C Db/Dc (ZONE 1 & 2 & Zone 21 & 22)
CERTIFICATION	:	CIMFR, BIS, PESO
TEMPERATURE CLASS	:	T6
MATERIAL	:	DIE CAST ALUMINIUM ALLOY
FINISH	:	EPOXY POWDER COATED SHADE AS PER IS : 5
EARTHING	:	1 No INTERNAL & 2 No's EXTERNAL
HARDWARE	:	STAINLESS STEEL
GASKET	:	'O' RING ENDLESS GASKET NEOPRENE / SILICON
NAME PLATE	:	SS NAME PLATE CUM WARNING PLATE
RATING	:	MAX UP TO 630 AMPS.

OPTIONS

SR.NO	PARTICULAR	OPTIONS
1.	MATERIAL OF CONSTRUCTION	STAINLESS STEEL
2.	GLAND & PLUG	BRASS / SS / ALUMINIUM
3.	COLOUR SHADE	631, 632, 355, 7031, 7032 etc.
4.	CANOPY	M.S POWDER COATED / FRP /GI

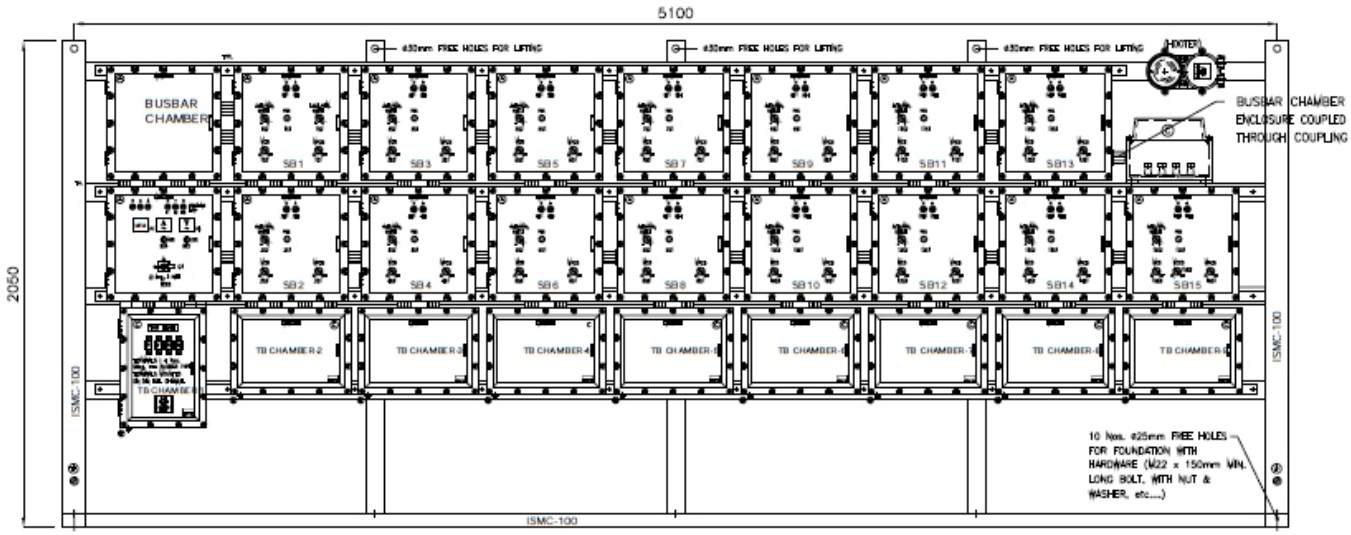

Front View of Soot Blower Panel

NOTE : PERMUTATION & COMBINATION FOR COMPONENTS ASPER CUSTOMER REQUIRMENT.